


5. H形鋼



寸法 mm	単位質量 kg/m	断面積 cm ²		断面二次半径 cm		断面二次モーメント cm ⁴		断面係数 cm ³	
		A	Aw	ix	iy	Ix	Iy	Zx	Zy
A × B × t ₁ × t ₂	W	A	Aw	ix	iy	Ix	Iy	Zx	Zy
200 × 200 × 8 × 12	49.9	63.53	14.08	8.62	5.02	4,720	1,600	472	160
250 × 250 × 9 × 14	71.8	91.43	19.98	10.80	6.32	10,700	3,650	860	292
300 × 300 × 10 × 15	93.0	118.40	27.00	13.10	7.55	20,200	6,750	1,350	450
350 × 350 × 12 × 19	135.0	171.90	37.44	15.20	8.89	39,800	13,600	2,280	776
400 × 400 × 13 × 21	172.0	218.70	46.54	17.50	10.10	66,600	22,400	3,330	1,120
◎594 × 302 × 14 × 23	170.0	217.10	76.72	24.80	6.98	134,000	10,600	4,500	700
◎700 × 300 × 13 × 24	182.0	231.50	84.76	29.20	6.83	197,000	10,800	5,640	721
◎800 × 300 × 14 × 26	207.0	263.50	104.72	33.00	6.67	286,000	11,700	7,160	781
◎900 × 300 × 16 × 28	240.0	305.80	135.04	36.40	6.43	404,000	12,600	8,990	842

◎印サイズご使用の際はあらかじめご相談ください。

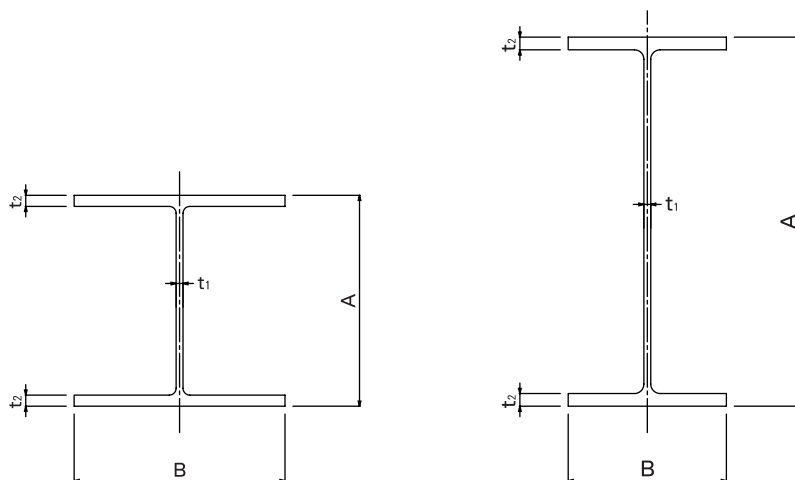